




NEW CONSTRUCTION WINDOWS

SSHTOWW SINGLE HUNG

theCORE  
window & door platform products by VEKA

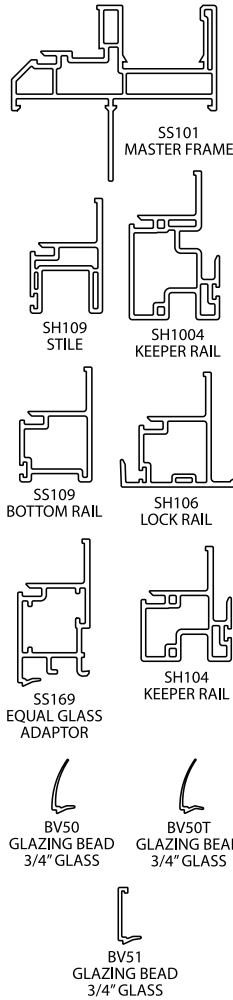

### FEATURES & BENEFITS

- Equal or unequal glass.
- Grade 35 performance.
- 3/4" glass package.
- 1-3/8" fin set back.
- Full 1" integral nailfin.
- Dual weatherstripping.
- Exterior glazed.
- Exterior frame bevel.
- Long reach interlock. No colliding or missing.
- Multi-chambered heavy wall frame for less roll.
- Double wall glazing tower on frame.
- Optional two piece field mulling system.
- Full family of Single Hung, Single Slider, 3-lite Slider, and Picture Window.

### MFG. LIMITATIONS

	Width
Minimum	*
Maximum	48"

	Height
Minimum	*
Maximum	96"

\* Minimum width and heights are determined by process machinery capabilities.

### BASELINE PERFORMANCE

#### Thermal Insulation

GLASS	Uc Value	R Value
Low-E/Argon/Dual	.29	3.44
Double Low-E/Argon	.23	4.35
Double Low-E/Krypton	.21	4.76

#### Structural Performance

Air Infiltration@ 25MPH	.08 cfm/ft <sup>2</sup>
Water Penetration	5.25 psf
Uniform Loads	+/- 52.5 psf

AAMA RATING: LC-PG35-H



### ASSEMBLIES

